




PRO-GRIP MAX[®] 240A

AIR COOLED MIG TORCH

250A CO₂, 220A Mixed Gas @ 60% Duty Cycle, EN60974-7, 0.8mm-1.2mm (.030"-.045") Wires

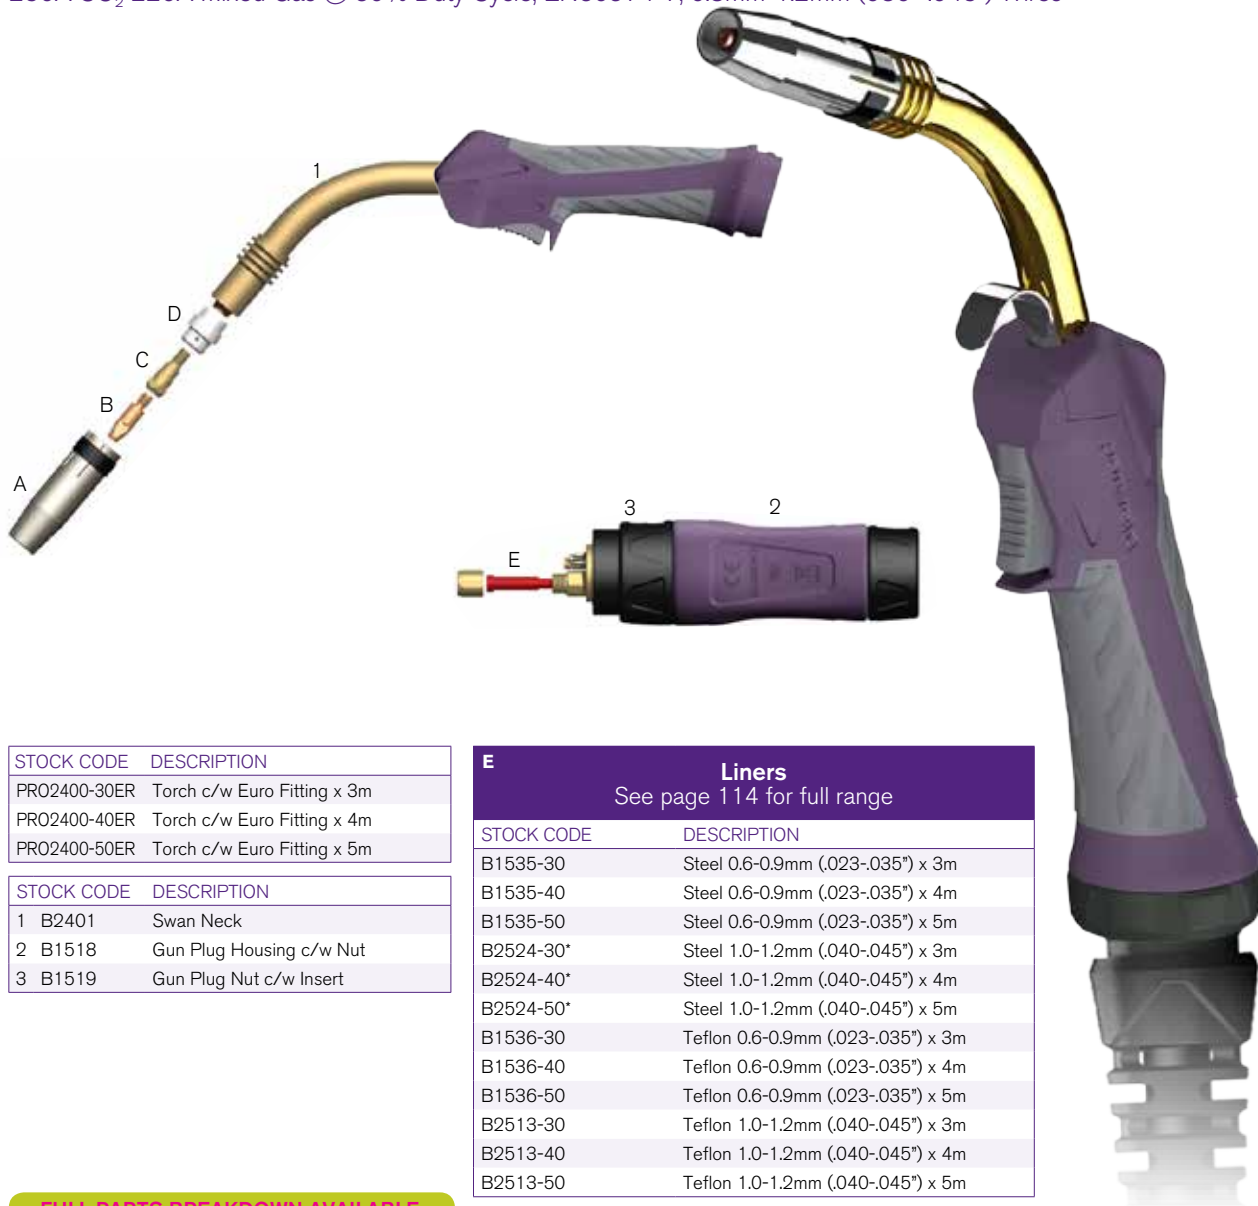

STOCK CODE	DESCRIPTION
PRO2400-30ER	Torch c/w Euro Fitting x 3m
PRO2400-40ER	Torch c/w Euro Fitting x 4m
PRO2400-50ER	Torch c/w Euro Fitting x 5m

STOCK CODE	DESCRIPTION
1 B2401	Swan Neck
2 B1518	Gun Plug Housing c/w Nut
3 B1519	Gun Plug Nut c/w Insert

E Liners See page 114 for full range	
STOCK CODE	DESCRIPTION
B1535-30	Steel 0.6-0.9mm (.023-.035") x 3m
B1535-40	Steel 0.6-0.9mm (.023-.035") x 4m
B1535-50	Steel 0.6-0.9mm (.023-.035") x 5m
B2524-30*	Steel 1.0-1.2mm (.040-.045") x 3m
B2524-40*	Steel 1.0-1.2mm (.040-.045") x 4m
B2524-50*	Steel 1.0-1.2mm (.040-.045") x 5m
B1536-30	Teflon 0.6-0.9mm (.023-.035") x 3m
B1536-40	Teflon 0.6-0.9mm (.023-.035") x 4m
B1536-50	Teflon 0.6-0.9mm (.023-.035") x 5m
B2513-30	Teflon 1.0-1.2mm (.040-.045") x 3m
B2513-40	Teflon 1.0-1.2mm (.040-.045") x 4m
B2513-50	Teflon 1.0-1.2mm (.040-.045") x 5m

FULL PARTS BREAKDOWN AVAILABLE
visit www.parweld.com for more
information.

ALTERNATIVE ENDS AVAILABLE
See pages 164 - 165 for more information.

Nozzles

A

64mm (2.36")

Bore

Ø17mm

STOCK CODE	STYLE	BORE
B2415	Cylindrical	17mm (11/16")
B2416*	Conical	13mm (1/2")
B2417	Tapered	10mm (3/8")

Contact Tips

B

28mm (1.10")

Ø8mm

M6

STOCK CODE	WIRE SIZE	MATERIAL
B2504-08	0.8mm (.030")	ECu
B2504-09	0.9mm (.035")	ECu
B2504-10*	1.0mm (.040")	ECu
B2504-12	1.2mm (.045")	ECu
B2504-08CR	0.8mm (.030")	ECu, CR Plated
B2504-10CR	1.0mm (.040")	ECu, CR Plated
B2504-12CR	1.2mm (.045")	ECu, CR Plated
B2504-10A	1.0mm (.040")	ECu, Al
B2504-12A	1.2mm (.045")	ECu, Al
B2505-08	0.8mm (.030")	CuCrZr
B2505-09	0.9mm (.035")	CuCrZr
B2505-10	1.0mm (.040")	CuCrZr
B2505-12	1.2mm (.045")	CuCrZr

Tip Adaptor

C

26mm (1.03")

M6

M6

STOCK CODE	TIP THREAD
B2412	M6

Diffusers

D

20mm (.79")

Ø9mm

1240

Ø14mm

STOCK CODE	COLOUR
B2405B	Black
B2405C*	Ceramic
B2405W	White

ROLL MARKING

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.

* Denotes standard build